

# Impeccable pool filtration

SIDE FILTERS 450 TO 950  
FOR FLOW RATES FROM 6 TO 35M<sup>3</sup>/H

TOP FILTERS 450 TO 620  
FOR FLOW RATES FROM 6 TO 14M<sup>3</sup>/H



# POLY PEARL Side filters

## TECHNICAL DATA

- Made in Europe
- Smooth inner surfaces to inhibit the growth of bacteria
- Air vent
- Transparent lid to allow inspection
- Injected polypropylene filter
- 5 Side filters, 450 to 950 for flow rates from 6 to 35m<sup>3</sup>/H
- Operating pressure up to 2 bars/ max 4 bars
- Filter-valve connection kit, 6-way valve included.




MADE IN EUROPE



Height of the filter medium	Sand	Filter weight	Packaging dimensions
mm	Kg 25 x n°	Kg	axbxc (mm)
300	3	9	477×477×580
400	4	12	545×545×730
400	6	14	635×635×750
450	10	27	800×800×965
520	18	37	980×980×970

## Filter dimensions

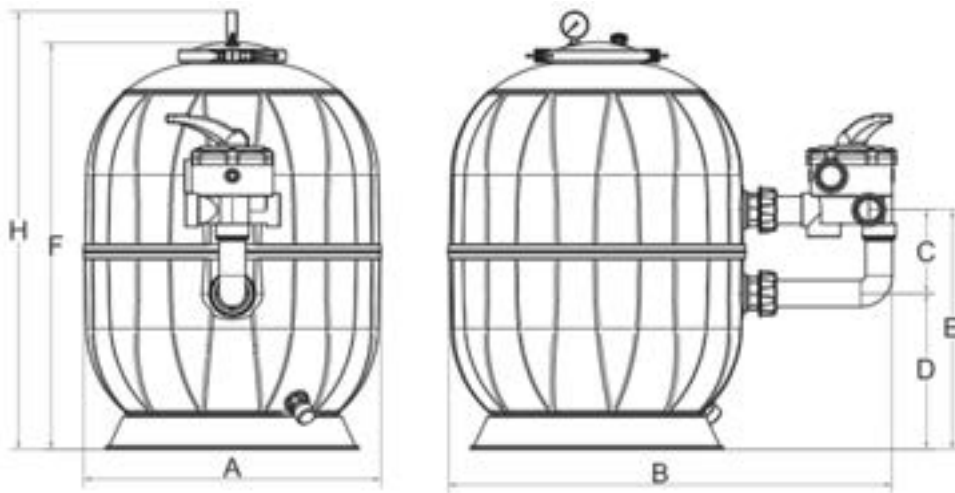


Filter diameter	Overall dimensions						
Ø A mm	B mm	C mm	D mm	E mm	F mm	H mm	Vanne
Ø 450	716	150	206	356	585	645	1"1/2
Ø 530	730	150	281	431	735	795	1"1/2
Ø 620	820	150	299	449	770	830	1"1/2
Ø 790	1102	200	360	570	955	1010	2"
Ø 950	1270	200	370	570	970	1025	2"

# POLY PEARL Top filters

## TECHNICAL DATA

- Made in Europe
- Smooth inner surfaces to inhibit the growth of bacteria
- Air vent
- Transparent lid to allow inspection
- Injected polypropylene filter
- 3 Top filters 450 to 620 for flow rates from 6 to 14m<sup>3</sup>/H
- Operating pressure up to 2 bars/ max 4 bars
- Filter-valve connection kit, 6-way valve included.

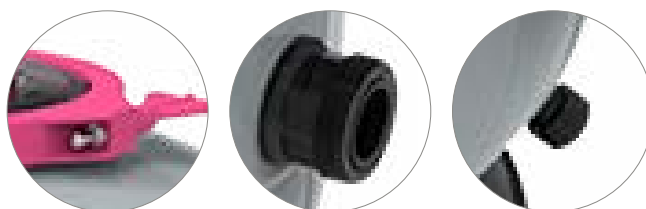

## Filter dimensions



Filter dimensions	Overall dimensions		Vanne
	Ø A mm	F mm	
Ø 450	600	770	1"1/2
Ø 530	756	926	1"1/2
Ø 620	792	962	1"1/2

Height of the filter medium	Sand	Filter weight	Packaging dimensions
mm	Kg 25 x n°	Kg	axbxc (mm)
300	3	9	477×477×580
400	4	12	545×545×730
400	6	14	635×635×750



**BWT**

**CHANGE  
THE WORLD**

*sip by sip*



Dealer's stamp: